

# WAY OF LIFE



## Light is right when it comes to choosing a portable 2-STROKE OUTBOARDS

### Small & Light

Suzuki's engineering experts have created a lighter and more compact DT15. At 33kg, the S-shaft models weigh not only less than their predecessors, but less than any other two-strokes available in their respective classes. The outboards also feature great new graphics that give these two-strokes a tough, distinct look along with a new retractable carrying handle that folds down and out of the way when not in use, also giving the engine a more compact form when mounted on the transom.

### Pointless Electronic Ignition (P.E.I.)




Suzuki's exclusive Pointless Electronic Ignition delivers a powerful spark to make starts easy. Added benefits include strong, reliable performance and prolonged sparkplug life.

### Suzuki's Anti-Corrosion Finish

All Suzuki outboards receive this specially formulated, anti-corrosion finish. Applying the finish directly to the aluminium alloy allows for maximum bonding between the finish and aluminium, creating an outstanding treatment against corrosion.

### Loop Charge Intake System

Dome-shaped pistons and cylinder heads help move more air and fuel into, and exhaust out of, the cylinder increasing both combustion and power for every stroke. With this, Suzuki's two-strokes deliver better fuel economy, more power per cm<sup>3</sup> and greater overall performance.

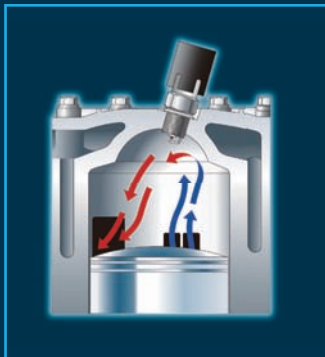

### Keystone Piston Rings

Special keystone piston rings use a unique design to deliver more power to the crankshaft with reduced energy loss. The rings also increase combustion efficiency, offer greater durability, reduce fuel consumption and lessen the chances of sticking rings.

### Programmed Tilt

The DF15 outboard features a programmed tilt system that offers easy, three-stage adjustment of the outboard angle for shallow water operation. The system is equipped with a reverse lock that automatically engages when the engine is returned to its normal operating position, to prevent the engine from kicking up.

### Through Prop Hub Exhaust

In addition to quiet operation, a through prop hub exhaust system provides greater exhaust efficiency, resulting in increased combustion and acceleration. Other advantages include reduced power loss and superior high-speed operation.





## SPECIFICATIONS

MODEL	DT40WR	DT40W	DT30R	DT15A
Transom Height (mm)	L: 508	L: 508	L: 508	S: 381 L: 508
Starting System	Electric	Manual	Electric	Manual
Weight (kg)	L: 76	L: 76	L: 59	S: 33 L: 34
Engine Type	2-stroke 2 Cylinders			
Displacement (cm³)	696		499	284
Bore x Stroke (mm)	79 x 71		71 x 63	59 x 52
Maximum Power (kW)	29.4		22.1	11
Full Throttle Operating Range (rpm)	5000-5600			4800-5600
Fuel Tank Capacity (l)	25			
Ignition System	Suzuki P.E.I.			
Battery Charging	12V 80W			12V 80W (Optional)
Steering	Remote	Tiller	Remote	Tiller
Trim Method (positions)	Manual Trim & Tilt (5)			
Fuel/Oil Mixing Ratio	50:1*			
Gear Shift	F-N-R			
Gear Ratio	2.09:1			1.92:1
Drive Protection	Rubber hub			
Propeller size (in.)** All Propellers are the 3-blade type.	11-1/2 x 9 11-1/2 x 10 11-1/2 x 11 11-5/8 x 12 11-1/2 x 13 11-3/8 x 14 11-1/4 x 15 11-1/8 x 16 11 x 17	10-1/4 x 9 (THICK) 10-1/4 x 10 10-1/4 x 10 (THICK) 10-1/4 x 11 10-1/4 x 12 10-1/4 x 12 (THICK) 10-1/4 x 13 10-1/4 x 14 10-1/4 x 15	9-1/4 x 8 (THICK) 9-1/4 x 8 (THICK) 9-1/4 x 9 9-1/4 x 9 (THICK) 9-1/4 x 10 9-1/4 x 10 (THICK) 9-1/4 x 11	

\* Suzuki "C.C.I." oil or NMMA (National Marine Manufacturers Association) certified TC-W3TM OIL. \*\*Select the propeller which fits within the range of the engine rpm of each model.

## FEATURES

MODEL	DT40WR	DT40W	DT30R	DT15A
Pointless Electronic Ignition (P.E.I.)	⚙	⚙	⚙	⚙
Over-rev Limiter	⚙	⚙	⚙	⚙
Start-in Gear Protection	⚙	⚙	⚙	⚙
Shallow Water Drive	⚙	⚙	⚙	⚙
Dual Water Intakes	⚙	⚙	⚙	⚙
Programmed Tilt				⚙
Retractable Carrying Handle				⚙
Through Prop Hub Exhaust	⚙	⚙	⚙	⚙
Keystone Rings	⚙	⚙	⚙	⚙
Loop Charge Intake System	⚙	⚙	⚙	⚙
Suzuki's Anti Corrosion Finish	⚙	⚙	⚙	⚙

⚙: Standard Equip.

⚙: Optional Equip.

\*: Specifications are different by an area.

## Standard Service Tool Kit

- Box Wrench 10mm x 12mm
- Box Wrench Handle
- Screwdriver Handle
- Emergency Starter Rope
- Box Wrench 21mm
- Combination Screwdriver
- Pliers
- Tool Bag

# SUZUKI

**POWER & TORQUE**



**50<sup>th</sup>**  
1965-2015  
**Anniversary**

# Light is Right 2-STROKE OUTBOARDS



Way of Life!



**SUZUKI AUTO South Africa (PTY) Ltd** | Tel: 0861 511 111 | Fax: 011 608 5489  
17 Enterprise Close, Linbro Business Park, Marlboro, 2090  
PO Box 1995, Kelvin, South Africa, 2054 | [www.Suzuki.co.za](http://www.Suzuki.co.za)

Please read your owner's manual carefully. Remember, boating and alcohol or other drugs don't mix. Always use a personal flotation device. Please operate your outboard safely and responsibly. Suzuki encourages you to operate your boat safely and with respect for the marine environment. Specifications, appearances, equipment, colours, materials and other items of "SUZUKI" products shown on this catalogue are subject to change by manufacturers at any time without notice and they may vary depending on local conditions or requirements. Some models are not available in some territories. Each model might be discontinued without notice. Please enquire at your local dealer for details of any such changes. Actual body colour might differ from the colours in this brochure. Published August 2014.